

Welded Wire Mesh



Ermir Shpk
Ura Kushes Elbasan
NIPTI : K63319202Q
NR.TEL : 069 60 86 705 ; 069 60 86 703


Welded Mesh are produced for wire welded in horizontal and vertical line, from cold drawn wire based on the standart SAE 1008, DIN 488. The diameter of the wire varies from Ø4 to Ø8 mm with dimmension of the mesh 2.15x6.00m. Other products can be made based on the clients requests.

Type-
Welded Mesh

Steel Quality-
Horizontal and
Vertical Wire: ASTM
510, DIN 488,
Produced from wire
drawn in cold
process as of
standart SAE1008

Dimmension of Mesh
2.15m wide, and 5
or 6 meter long.

Packaging-weight;
Mesh are packaged
in 50 or 100 units,
where one mesh
weighs from 14kg-
105kg.

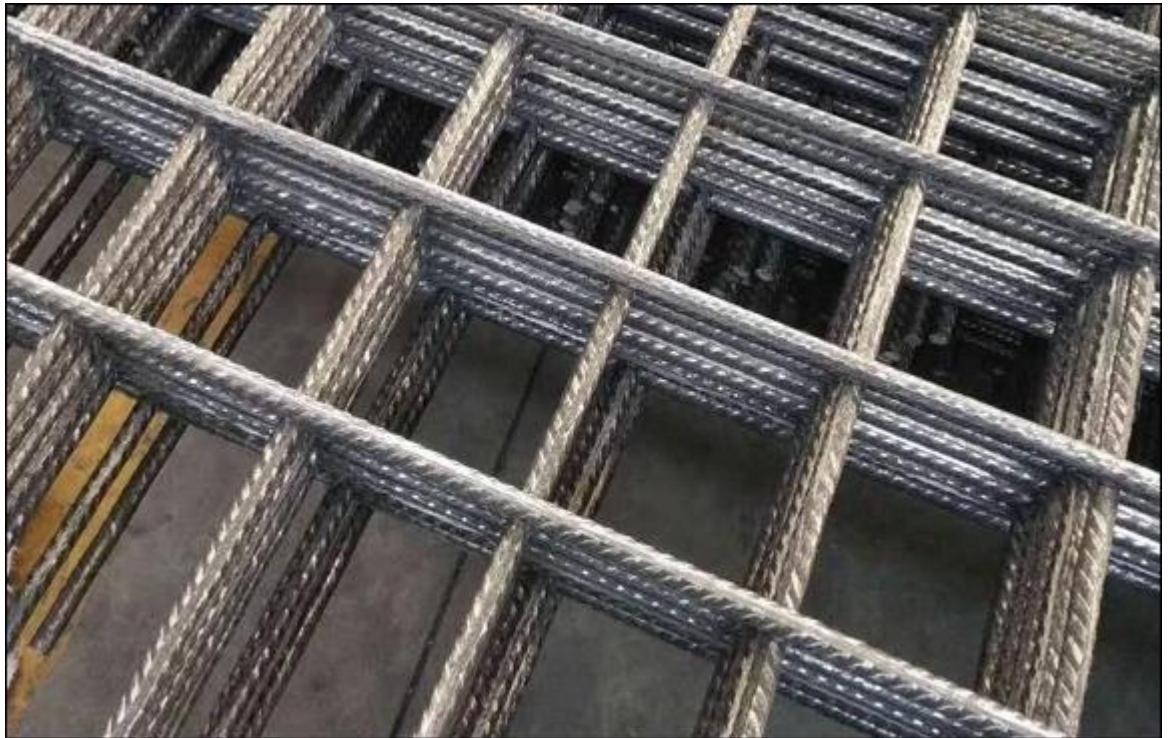

Ermir Shpk
 Ura Kushes, Bradashesh,
 Elbasan NIPTI : K63319202Q
 NR.TEL : 069 60 86 705 ; 069 60 86 703



Model Mesh	Ø Legth [mm]	Ø Horizontal [mm]	Mesh Length [cm]	Mesh Horizontal [cm]	Mesh Dimmension	Pesha Zgares [kg]	Pesha kg/m2
Q 84	4	4	15	15	600x215	17.42	1.35
Q 92	4.2	4.2	15	15	600x215	19.06	1.48
Q 111	4.6	4.6	15	15	600x215	23.11	1.79
Q 126	4	4	10	10	600x215	26.1	2.02
Q 131	5	5	15	15	600x215	27.38	2.12
Q 139	4.2	4.2	10	10	600x215	28.37	2.23
Q 166	4.6	4.6	10	10	600x215	34.27	2.66
Q 188	6	6	15	15	600x215	39.46	3.06
Q 196	5	5	10	10	600x215	40.6	3.15
Q 221	6.5	6.5	15	15	600x215	46.22	3.58
Q 238	5.5	5.5	10	10	600x215	49.3	3.82
Q 257	7	7	15	15	600x215	53.68	4.16
Q 283	6	6	10	10	600x215	58.52	4.54
Q 331	6.5	6.5	10	10	600x215	68.54	5.31
Q 335	8	8	15	15	600x215	70.22	5.44
Q 385	7	7	10	10	600x215	79.61	6.17
Q 503	8	8	10	10	600x215	104.13	8.07
Q 131 A	5	5	20	20	600x215	20.1	1.56
Q 188 A	6	6	20	20	600x215	29	2.25
Q 257 A	7	7	20	20	600x215	39.41	3.06
Q 335 A	8	8	20	20	600x215	51.55	4
R126	4	4	25	10	600x215	18.36	1.42
R131	5	4.2	25	15	600x215	19.68	1.53
R139	4.2	4.2	25	10	600x215	20.21	1.57
R166	4.6	4.2	25	10	600x215	23.01	1.78
R188	6	4.2	25	15	600x215	25.86	2
R196	5	4.2	25	10	600x215	26.21	2.03
R221	6.5	4.2	25	15	600x215	29.3	2.27
R 238	5.5	4.2	25	10	600x215	30.61	2.37
R 257	7	5	25	15	600x215	35.48	2.75
R 283	6	4.2	25	10	600x215	35.28	2.73
R331	6.5	4.6	25	10	600x215	41.44	3.21
R335	8	5	25	15	600x215	43.93	3.41
R385	7	5	25	10	600x215	48.29	3.74
R442	7.5	5.5	25	15	600x215	56.01	4.34
R503	8	6	25	10	600x215	64.23	4.98